




# Instruction Manual

## Smart Switch

### Wi-Fi+RF433 Neutral+Live

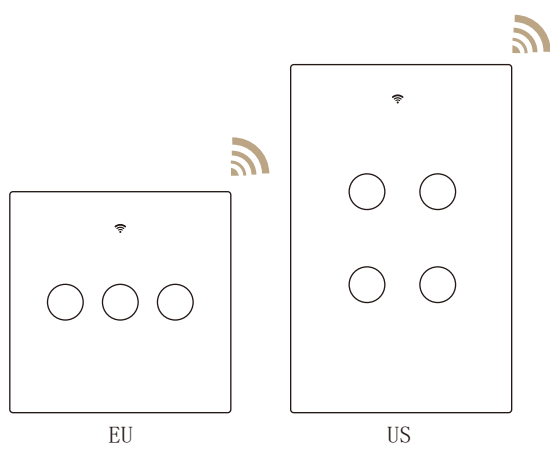

- \*Bitte scannen Sie den QR-Code hier für eine Anleitung in deutscher Sprache
- \*Por favor escanear el código QR aquí para instrucciones en español
- \*Veuillez scanner le QR code ici pour des instructions en français
- \*Пожалуйста, отсканируйте QR-код здесь, чтобы получить инструкции на русском языке.
- Leia o código QR aqui para obter instruções em português

## Product Description

This new designed glass panel wireless touch smart switch is designed with WiFi+RF to replace traditional switches with a variety of ways to control. Now one new smart feature as multi-control association to other smart switches is added into the Smart Life/Tuya App, together with the backlight on/off and relay status. And its scratch resistance glass panel is suitable for different decoration styles with its best value.

Note: Button sound on and off: no button operations before operations begin within 6 seconds. Then press switch button for 4 times and long press for the fourth time until the switch beep sounds as Di-Di for 2 times for successful operation.

## Safety Information

Risk of Electric Shock: Electricity can cause personal injury and property damage if handled improperly. If you are not sure about any part of these instructions, please seek professional

## Technical Parameters:

Model: WS-EU-RF / WS-US-RF  
Voltage: 90-250V AC, 50/60Hz  
Max. Current: 10A/Gang; Total 10A  
Wireless Protocol: Wi-Fi 2.4GHz+RF433MHz

## Warnings:

Turn off the power at the circuit breaker and test that power is off before wiring.

## Installation

### Note:

- \* Make sure that the power at the circuit breaker is off before wiring.
- \* Neutral Wire is required. Confirm the wall box contains a Neutral Wire (typically white). If the wall box don't have a Neutral Wire, please try another location at your home or call a professional electrician to install the switch.
- \* The wire colors indicated in this manual are the usual colors and may differ in some houses. Ensure the wire conductors are securely fastened to each wire.
- \* Ensure the Wi-Fi signal is steady and normally working before wiring.
- \* If you don't have any wiring experience, please call




### Attention:

Please disconnect the power supply before installing or removing the device for avoiding irreversible damage on the device from the electric current or some unpredictable problems such as lamp flashing.

### Step 2

- \* Remove the old switch

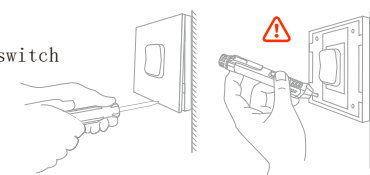

### Step 3


- \* Remove the switch and pull it away from the wall. Identify Line/Load Wire (Note: The color of your wire may be different from the color shown on the

### Verify power is off

- \* We recommend you remove the faceplate from the old switch and use an electrical tester to test all wires connected to the switch to ensure there is no voltage in the circuit.
- \* You may need to turn off more than one circuit breaker.

### Step 4


- \* Take pictures of the wiring



- \* Follow the wiring diagram to connect the switch wires to the wires in the wall box with the wire

### Step 5


- \* Remove the panel with screwdriver (Please don't install with electricity power on)




### Step 6

- \* Prepare to install wiring
- A. Live wire connects "L" terminal
- B. Neutral wire connects "N" terminal
- C. Lamp wire connects "L1, L2, L3, L4" terminal
- 1 Gang connects "L1" terminal
- 2 Gang connects "L1, L2" terminal
- 3 Gang connects "L1, L2, L3" terminal
- 4 Gang connects "L1, L2, L3, L4" terminal
- 1 Gang L1 and N line.
- 2 Gang L1 and N line.
- 3 Gang L1 and N line.

### 1-3 Gang

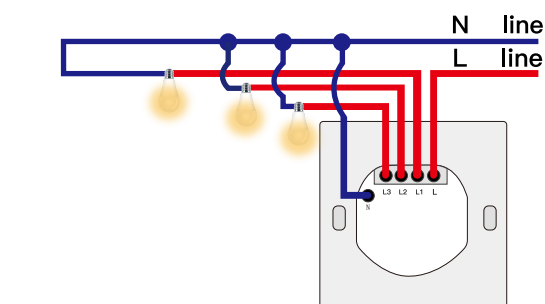


### 4 Gang

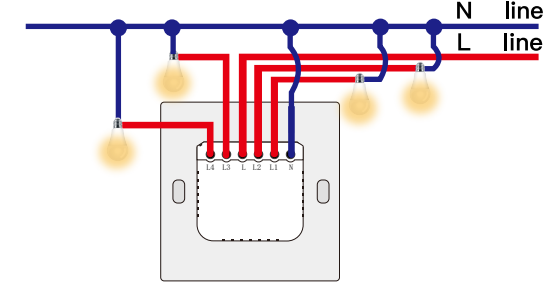

### Step 7

- \* Put the switch into switch box in the wall
- \* Mount the two side screws
- \* Install the glass panel (install from up above)
- \* Finish installation

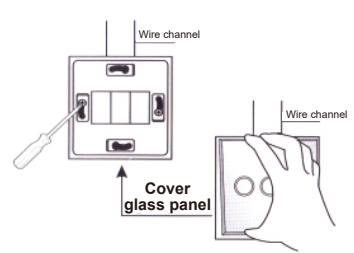

## Add Devices

### 1. Download Smart Life App



Please scan the QR code or download Smart Life on App store.

### 2. Registration or Log in

- \* Download "Smart Life" Application
- \* Enter the Register/Login interface; tap "Register" to create an account by entering your phone number to get verification code and "Set password". Choose "Log in" if you already

### 3. Configure the APP to the switch


- \* Preparation: Ensure the switch has been connected with electricity; ensure your phone has been connected to Wi-Fi and is able to connect to the

### Note:

The switch only supports 2.4G network. If you have connected 5G network, please disconnect 5G network firstly and connect 2.4G network.


### Wi-Fi link method:

- Pair and clear up the WiFi code (New Updated)
- 1. Make sure your phone is connected to Wi-Fi and Bluetooth.
- 2. Open Smart Life/Tuya App and Click "+", then the prompt page will automatically show on the screen.

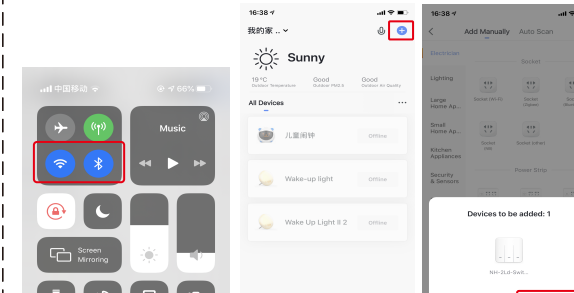


- (1)
- (2)


- 3. Select the device you want to add and click

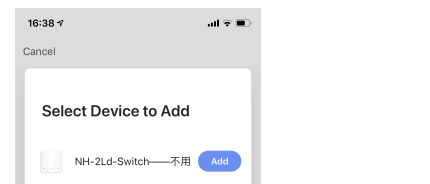

- 4. Enter Wi-Fi Password and click "Confirm", waiting for completing the connection.

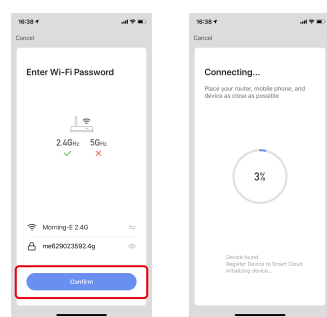

- 5. Add the device successfully, you can edit the name of the device to enter the device page by

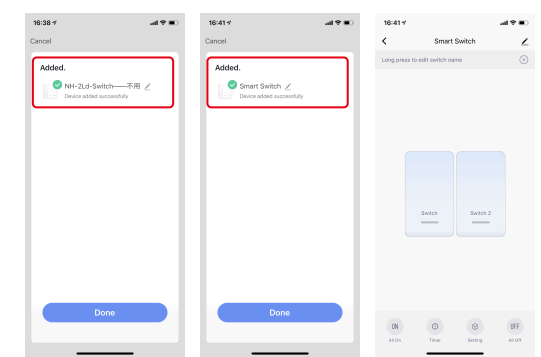

### How to reset/re-pair Wi-Fi code

Press the switch button for 6 times, and hold on the 6th time, then release until you hear Di-Di-Di (3 times), and the blue indicator on the switch will


### Remote radio frequency (RF) link method:

- Pair and clear up the RF code
- 1. How to pair the RF code
- 1.1 (can be turned on and off): Confirm your switch is off before operations. Press the switch button for about 8 seconds until you hear Di-Di (2 times). Then the matching of RF code is successful. The key of the remote controller can control the switching of the state of the switch on and off corresponding to 1.2 (Open only): Confirm your switch is off before operations. Press the switch button for about 5 seconds until you hear Di (1 time). After that, release the button, press the corresponding button on the remote control to turn on. Then the matching of RF codes is successful. The key of the remote controller can control the corresponding position of the switch
- 1.3 (Close only): Confirm your switch is on before operations. Press the switch button for about 5 seconds until you hear Di (1 time). After that, release the button, press the corresponding button on the remote control to turn on. Then the matching of RF codes is successful. The key of the remote controller can control the corresponding position of the switch
- 2. How to clear up the RF code
- Confirm your switch is off before operations. Press the switch button for a long time until you hear Di-Di-Di (4 times), and then release the button. The RF code is now cleared up.


### How to achieve multi-control association

Note: Please confirm you have successfully finished the WiFi link method above for adding this switch to your Smart Life App. (If there is a smart switch having been added before to the app, just go to next step.) Note: There is no need to wire the new added switch to the light, only L and N are required for wiring.

- 1. WiFi add another smart switch to the same Smart Life/Tuya App. (If there is a smart switch having been added before to the app, just go to next step.) Note: There is no need to wire the new added switch to the light, only L and N are required for wiring.
- 2. Then you will see two devices in the app and click the main switch (as One gang switch as below) by

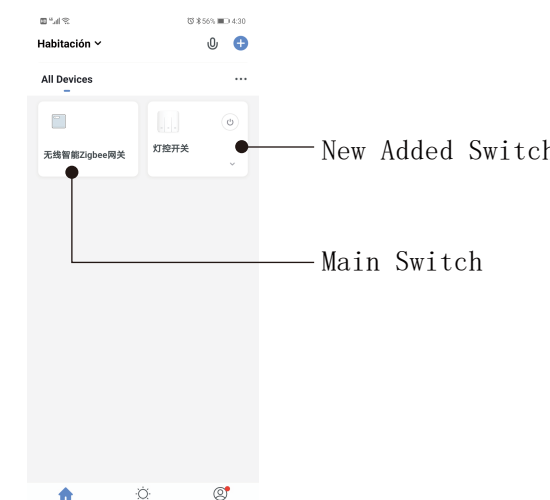

### 3. Click

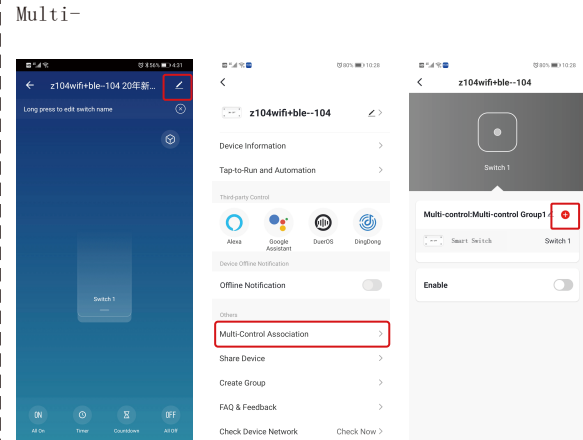


- 4. Choose the switch that you want to associate to and then choose the switch button that you want to control the same light.

- 5. Then go back to previous page, you will see two items in the page, one is your main switch, the other is the one you associate just now. Note: Please confirm the associated switch is enabled.

- 6. Now you are able to control your light with two switches. Do not associate another button in the same switch for multi-control.

- 7. If you want to add another third or more smart switches to control your light, just repeat the steps above. And you will see the result as below when you associate another switch.

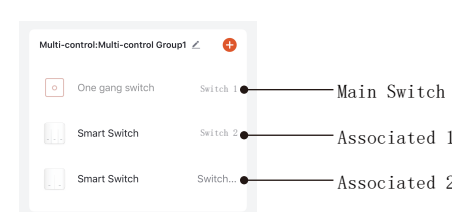



## Enter Smart Life Skill in Alexa APP

- 1. Complete product networking configuration in the App

Complete the device's networking configuration according to the prompts in the App. Note: In the App, change the name of the device to an easily identifiable name such as Alexa; names are usually in English, such as "bed light".

- 2. Configure the Amazon Echo device

- (If you have already configured Amazon Echo, you can skip this step. The following instructions are based on the iOS client.)
- \* Make sure you Amazon Echo device is powered on and connected to a Wi-Fi network.
- \* Open the Alexa App on your phone. After successful login, tap on the menu in the upper left corner of the Home page, select "Settings" and tap "Set Up A New Device" to set up the Amazon Echo.
- \* Choose your Amazon Echo device type and language for connecting. Press and hold the small dot on the device until the light turns yellow. Then tap "Continue" to connect to the hotspot.
- \* After connecting to the Amazon Echo hotspot, return to the page. At this point, the connection is successful.

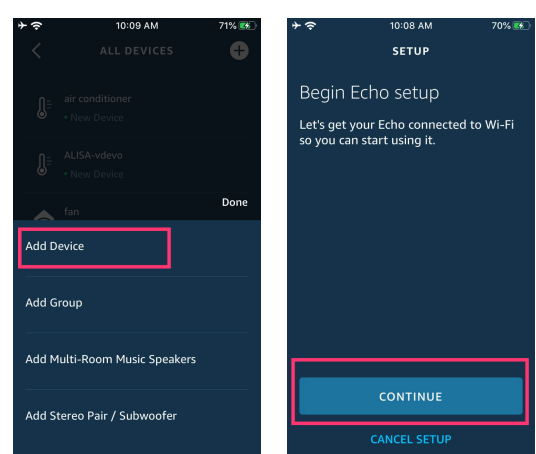


- Tap "Continue" to proceed to the next step. Choose a Wi-Fi network to connect to. Amazon Echo will take a few minutes to try to connect to the network.


After the network connection is successful, tap "Continue". An introduction video will appear. After the video ends, tap "Continue" to jump to the Alexa Home page. You have now completed the

### 3. Key step — Link Skill

- \* Tap on "Skills" in the Alexa App menu.

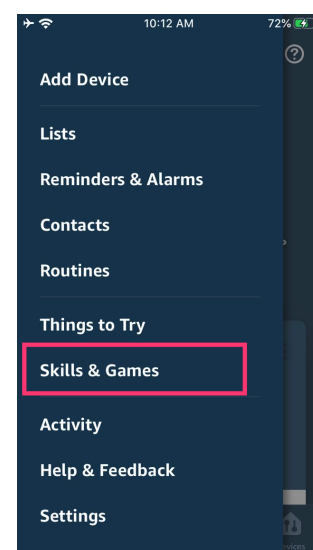

- \* Then search for "App Name". Tap "Enable" to enable the Skill.
- \* Enter the App account and password, then tap "Link Now" to link your App account to enable the Skill. Now you can start your smart home journey.

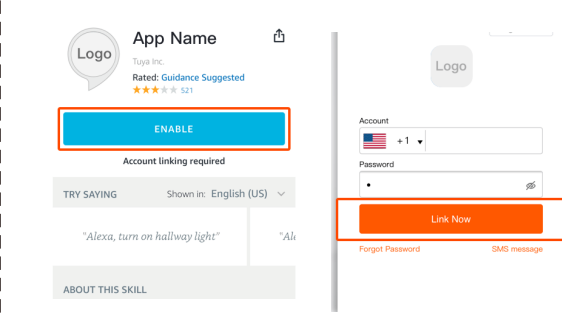

### 4. Common commands

	Voice Command	
Alexa Echo	Alexa, turn on <Device Name>.	eg: Alexa, turn on bedroom light.
	Alexa, turn off <Device Name>.	eg: Alexa, turn off bedroom light.
Google Home	OK Google, turn on <Device Name>.	eg: OK Google, turn on bedroom light.
	OK Google, turn off <Device Name>.	eg: OK Google, turn off bedroom light.
	OK Google, is <Device Name> on?	eg: OK Google, is <bedroom light> on?

## SERVICE

- 1. During the free warranty period, if the product breaks down during normal use, we will offer free maintenance for the product.
- 2. Natural disasters/man-made equipment failures, disassembly and repair without the permission of our company, no warranty card, products beyond the free warranty period, etc., are not within the scope of free warranty
- 3. Any commitment (oral or written) made by the third party (including the dealer/service provider) to the user beyond the warranty scope shall be executed by the third party
- 4. Please keep this warranty card to ensure your rights.
- 5. Our company may update or change the products without notice. Please refer to the official website for updates.

## RECYCLING INFORMATION

All products marked with the symbol for separate collection of waste electrical and electronic equipment (WEEE Directive 2012/19 / EU) must be disposed of separately from unsorted municipal waste. To protect your health and the environment, this equipment must be disposed of at designated collection points for electrical and electronic equipment designated by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences for the environment and human health. To find out where these collection points are and how they work, contact the installer or your local authority.

## WARRANTY CARD

Product Information

Product Name \_\_\_\_\_

Product Type \_\_\_\_\_

Purchase date \_\_\_\_\_

Warranty Period \_\_\_\_\_

Dealer Information

Customer's Name \_\_\_\_\_

Customer Phone \_\_\_\_\_

Customer Address \_\_\_\_\_

### Maintenance Records

Failure date	Cause Of Issue	Fault Content	Principa

Thank you for your support and purchase at we Moes, we are always here for your complete satisfaction, just feel free to share your great shopping experience with



If you have any other need, please do not hesitate to contact us first, we will try to meet your demand.

### Estamos nas Redes Sociais

- f @haizbrasil
- yt /haizbrasiloficial
- ig @haizoficial
- www.haiz.ai
- whatsapp @haizbrasil

HAIZ  
Address: Av. Piracema, 1411 - Tamboré, Barueri - SP, 06460-030

Tel: +55 (11) 3227-7439

Email: atendimento@haiz.ai